

PRODUCT RANGE



Ashapura Belcon Superb Range Of Single And Double Toggle Jaw Crusher For Top Capacities And Products Quality



Quality Is Our First Priority...

Double Toggle
Double Wheel

Single Oil PUMP/Double Oil Pump, TWO PIECES GEARING SYSTEM



Company reserve the right to make any alterations, or modifications which we consider or improvement.

Do not use above dimensions for actual installation work.

WE ARE ALSO MANUFACTURE "ABE" BRAND JAW CRUSHER, VIBRATING SCREEN, CONVEYORS, TRUCK LOADER ALL TYPES OF QUARRY EQUIPMENTS.

ASHAPURA BELCON ENGINEERS

ASHAPURA BELCON ENGINEERS

We manufacture equipment for Coal Handling System for Captive Power Plant, Sponge Iron Plant, Iron Ore Plant, Aggregate/Stone Crushing & Crushing & Screening Plant.

Our Range of Products

Roll Crusher : (Type - Smooth/Toothed) Single, Double, Three Roll, Four Roll
Size : 400 mm Ø to 1600 mm Ø, 400 mm wide to 2800 mm wide


Vibrating Screen : Single, Double, Triple, Four Deck (Dust cover Enclosure/ Without Dust cover Enclosure & Multi Deck, Roller Bar)
Size : 400 mm wide to 2500 mm width, 1000 mm length to 8000 mm length

Jaw Crusher : Single Toggle (Grease Type) / Double Toggle (Oil Lubricated)
Size : 8 inch x 4 inch to 48 inch x 44 inch

Impactor : for Application material - Coal, Stone, Granite, Line Stone
Size : 600 mm Ø to 1600 mm Ø, 400 mm width to 1600 mm width

Hammer Mill : Reversible / Non Reversible
Size : 250 mm Ø to 1200 mm Ø, 400 mm width to 2800 mm width

Vib. Grizzly Feeder :
Size : 800 mm width to 1800 mm width, 1500 mm length to 6000 mm length

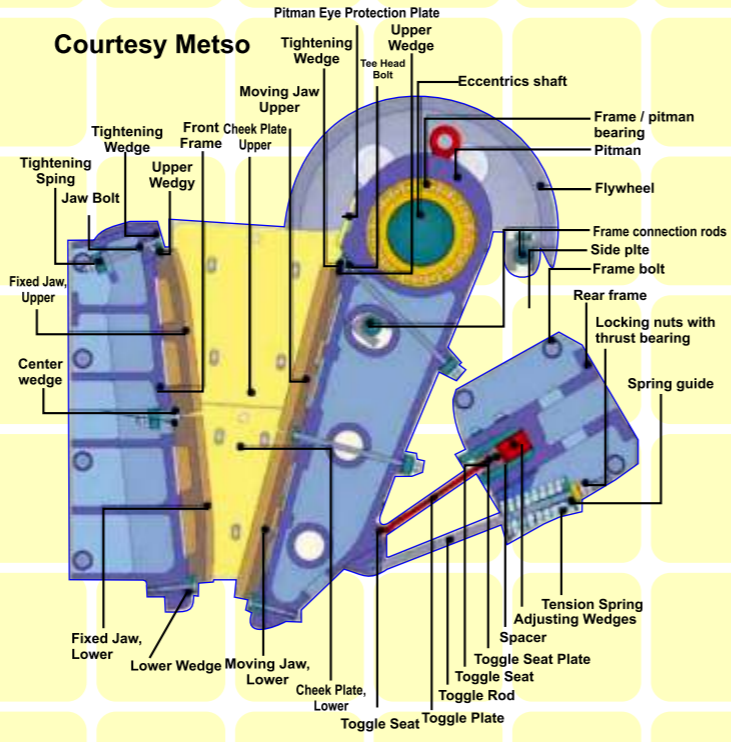

Features : Reliable Structure, High Productivity, Easy Adjustment & Economic Cost.
Impactor Is Designed For Crushing Ores & Rocks With Particle Sizes Less Than 120-300 Mpa. mm and compression strength no more than 320 mpa. Used Material Having Low Silica Contain.
Features : Big Primary Reduction, Ratio, High Efficiency, Cubical Shape, Selectable Crushing Etc.




Turnkey Project
 for Crushing & Screening Plant
 Up to 300 TPH

Vibrating Feeder
 Design for fast, Accurate & Efficient Screening
 Low cost of operation & easy maintenance

Double Toggle Jaw Crusher
 Design for fast, Accurate & Efficient Crushing
 Without Rubbing

Crusher	Size	Feed Size	Capacity in tons per hour with Jaw setting of													Drive H.P.	Motor R.M.P.	Crusher R.P.M.	
			Inch	½	3-4	1	1.25	1.5	2	2.5	3	3.5	4	5	6				
	Inch	mm	Inch	mm	13	20	25	32	38	50	63	75	88	100	125	150			
12x7	300x175	5.5	6	7	8	10	13	18	25								10/15	1440	375
16x9	400x225	7	6	10	13	15	17	22	32								25	1440	360-390
20x12	500x300	10		12	16	20	24	32	40								30	1440	350-380
22x9	550x225	7	10	13	16	21	28	37	45	57							30	1440	350-380
24x12	600x300	10		14	19	24	29	38	48								35	1440	350-380
30x9	750x225	7	12	18	24	30	36	40	42	65	70	85					40	1440	350-380
30x15	750x375	12					36	45	58	70	82	94	120				40/50	1440	320-350
30x20	750x500	18					36	48	60	70	82	94	120				50/60	1440	330-360
32x6	800x150	4	12	19	25	32	38	46									40	1440	330-360
36x8	900x200	6	14	22	29	36	43	52									50	1440	320-350
36x24	900x600	20							85	110	125	140	170				75	960	330-360
42x6	1050x150	4	20	26	33	40	46										60	960	320-350
42x30	1050x750	24										130	160	180	205	100	960	240-370	
48x9	1200x225	7	19	29	38	48	57	76	96								75	960	320-350
48x36	1200x900	30											195	230	125/150	960	220-250		

Jaw Settings shown on the left side of the red thick line not advisable. If any one desires to keep setting closer than recommended, It is a must to maintain the feed size in the ratio 8 : 1

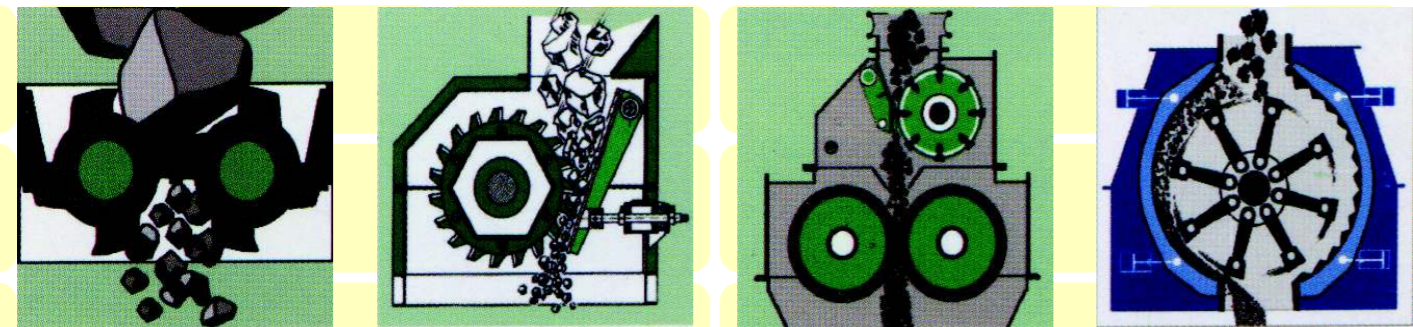

Manufacturer Of :

- Jaw Crusher - Single / Double Toggle (Oil / Grease Base)
- Roll Crusher (Smooth / Tooth Roll Crusher)
- Hammer Mill (Reversible)
- Impact Mill (Coal Impactor)
- Impact Crusher (RockHard Material)
- Vibrating / Roller Screen (Multi-Deck - with/without dust cover)
- Mobile Crushing Plant
- Single / Double Roll Crusher
- Three / Four Roll Crusher
- Twin Tube Vibrating Mill
- Vibrating Grizzly Feeder
- All Types Of Conveyors